


# 32" Slim Outdoor Wall-Mounted Digital Signage (BT-PH32WOUT)



24/7  
Performance

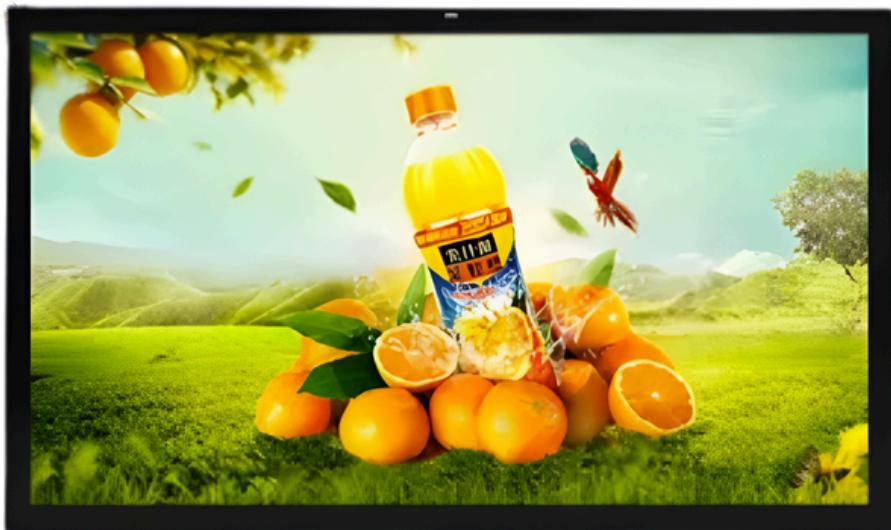

High-Visibility  
Display



Full HD  
Resolution



Ventilation  
Cooling  
System




Eco-Friendly  
Power Timer



Laminated  
Tempered  
Glass

# Product Dimensions

## **Product Dimensions:**

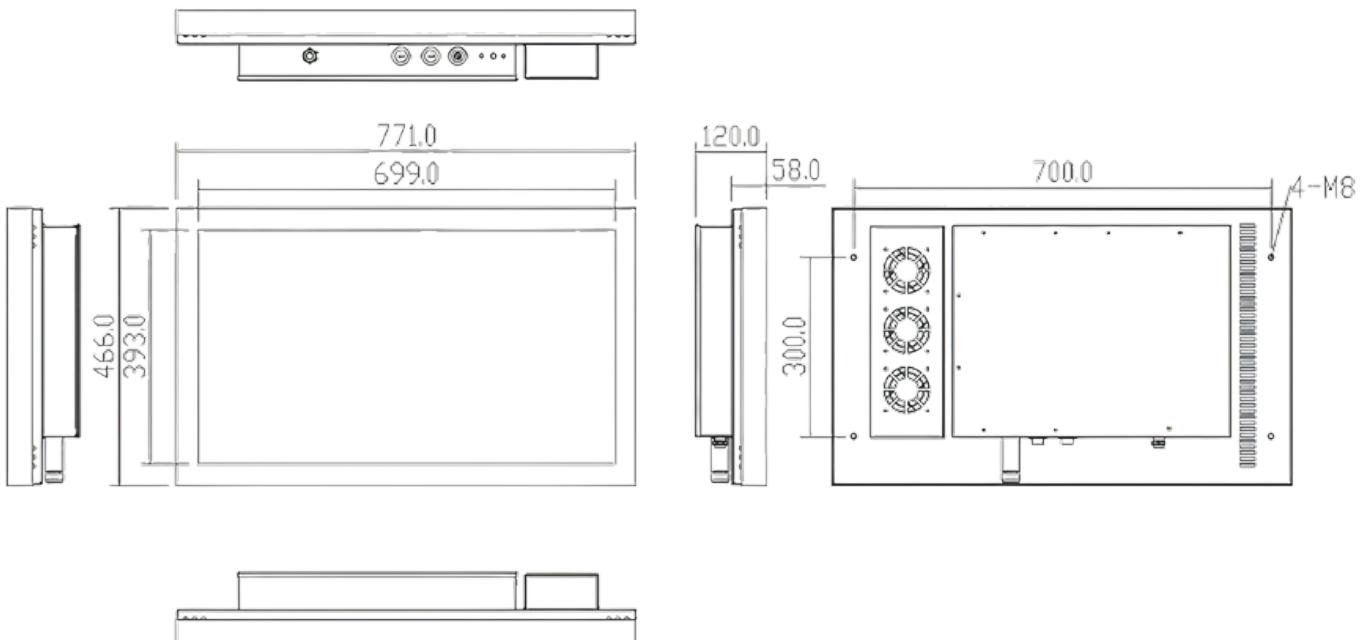

Product Width: 771 mm / 30.35 in

Product Height: 466 mm / 18.34 in

Product Depth:

With Wall Mount: 158 mm / 6.22 in

Display Section: 122 mm / 4.8 in

Bezel Width: Left / Right: 36 mm; Top / Bottom: 36.5 mm

Product Weight (with Wall Mount): 36 kg / 79.37 lbs

# Full Specifications

<u>Connectivity</u>	
Audio Output	3.5 mm Audio Jack
Video Input	HDMI 2.0 × 1 USB 3.0 × 2
External Control	RJ45
<u>Display Specifications</u>	
Diagonal Size	32"
Aspect Ratio	16:9
Panel Resolution	1920 × 1080p
Brightness	3000 cd/m <sup>2</sup>
Display Colours	16.7M
Contrast Ratio	1200:1
Viewing Angle (H/V)	178° / 178°
Protection Level	IP65 IK10 Tempered Glass
<u>Operating System</u>	
Pre-installed OS	Android 11/13/14
<u>User Convenience</u>	
Installation Options	Landscape or Portrait
Energy-Saving Features	Smart Power energy-saving technology
<u>Audio</u>	
Built-in Speakers	None
<u>Power</u>	
Power Supply	200–240 V~, 50–60 Hz, 1.2 A
Power Consumption Typical	250 W
Compliance	Meets UL60950-1 international safety standard, CE, FC, RoHS Compliant
<u>Operating Environment</u>	
Operating Temperature Range	-20 ~ 45°C
Mean Time Between Failures (MTBF)	50,000 hours

<b><u>Multimedia Application Support</u></b>	
USB Video Playback Formats:	MPEG, H.264, H.263, H.265, AVI, MP4, VP8
USB Audio Playback Formats	AAC, HEAAC, MPEG
USB Image Playback Formats	BMP, JPEG, PNG
<b><u>Built-in Hardware</u></b>	
Processor (CPU)	Quad-core Cortex-A55
Graphics Processor (GPU):	Mali-G52 MC1
Memory (RAM)	4 GB DDR
Storage	32 GB
<b><u>Accessories</u></b>	
Expansion bolts M12×80	x4
Remote Control	x1
<b><u>Other Information</u></b>	
On-screen Menu Languages	Supports Multiple Languages
Warranty	3-year warranty
<b><u>Interfaces</u></b>	
RJ45	x1
Motherboard	RK3568

\*Specifications are subject to change without notice.