



49" Double-Sided IP55 Outdoor Floor – Standing Totem (BT-TH49OUT-D)



24/7
Performance

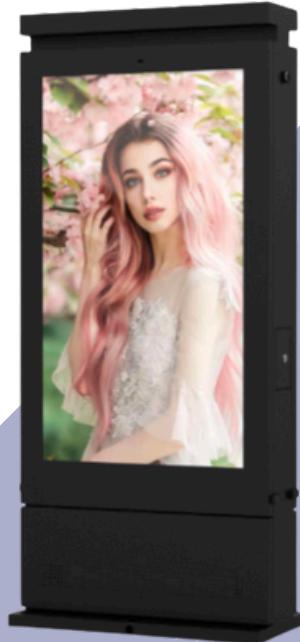

High-Visibility
Display



IP55 Weather-
Resistant
Enclosure



Smart
Temperature
Control




Eco-Friendly
Power Timer



IPS Panel
Technology

Product Dimensions

Product Dimensions:

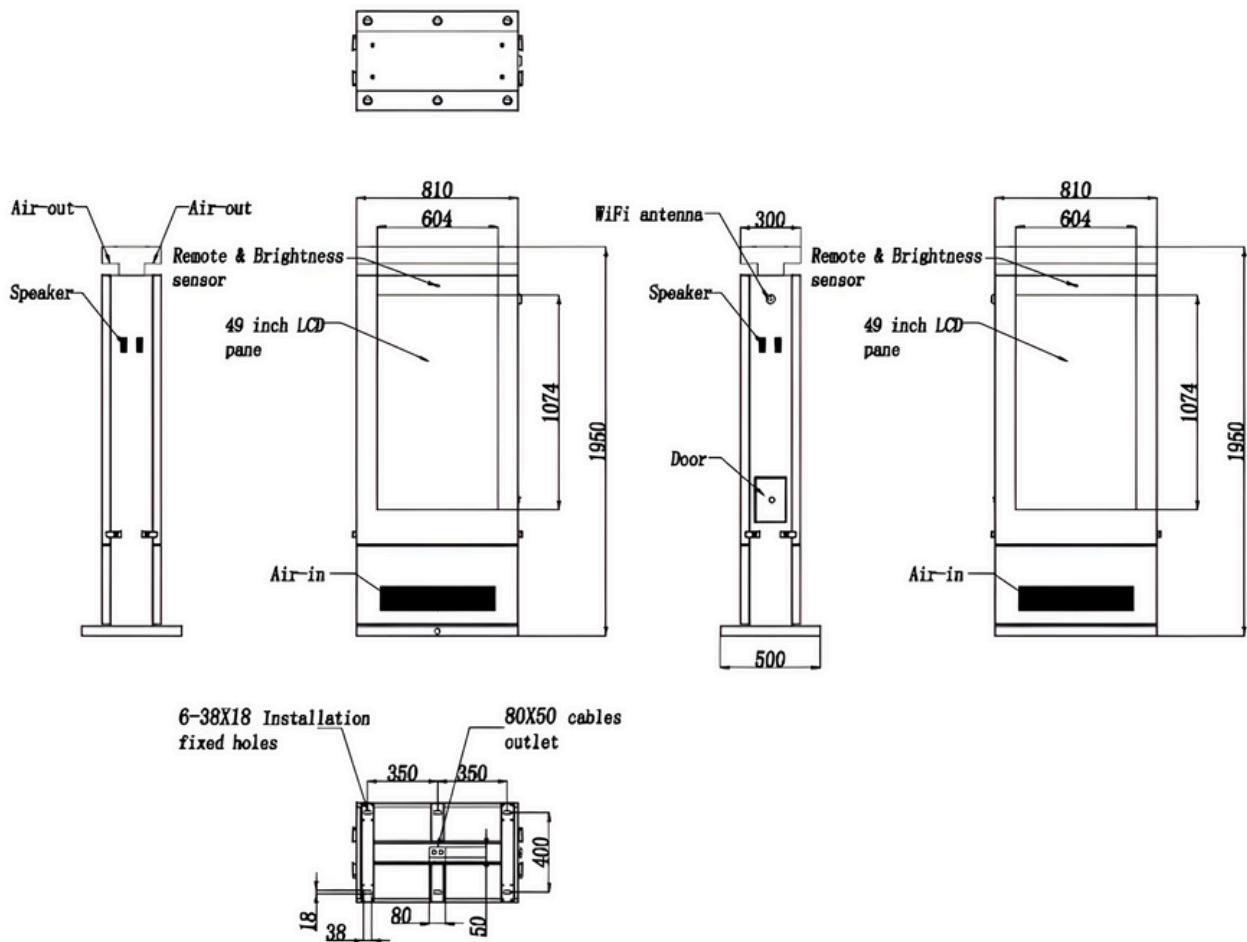

Product dimensions(H x W x D): 1950 x 810 x 300 mm

Product Weight: 180 kg

Full Specifications

<u>Connectivity</u>	
Audio Output	3.5 mm Audio Jack
Video Input	HDMI 2.0 × 1 USB 3.0 × 2
External Control	RJ45
<u>Display Specifications</u>	
Diagonal Size	49"
Aspect Ratio	16:9
Panel Resolution	1920×1080p
Brightness	2500 cd/m ² 3000,3500 cd/m ² (optional)
Display Colours	16.7M
Contrast Ratio	1200:1
Viewing Angle (H/V)	178° / 178°
<u>Operating System</u>	
Pre-installed OS	Android 11/13/14
<u>User Convenience</u>	
Installation Options	Portrait
Energy-Saving Features	Smart Power energy-saving technology
<u>Audio</u>	
Built-in Speakers	8Ω 10W × 2
<u>Power</u>	
Power Supply	AC 110-240V, 50/60Hz
Power Consumption	760 W
Compliance	Meets UL60950-1 international safety standard, CE,FC,RoHS Compliant
<u>Operating Environment</u>	
Operating Temperature Range	-20 ~ 45°C
Mean Time Between Failures (MTBF)	50,000 hours
<u>Multimedia Application Support</u>	
USB Video Playback Formats:	MPEG, H.264, H.263, H.255, AVI, MP4, VP8
USB Audio Playback Formats	7. AAC, HE-AAC, MPEG
USB Image Playback Formats	BMP, JPEG, PNG

<u>Built-in Hardware</u>	
Processor (CPU)	Quad-core Cortex-A55
Graphics Processor (GPU):	G52 MC1
Memory (RAM)	4 GB DDR
Storage	32 GB
<u>Accessories</u>	
Locking-Handle Key	x1
M12 × 80 expansion/anchor bolts	x6
Lifting bolts (GB825-88), M12	x2
Blanking covers (plug covers)	x2
MS704-2 key × 1	x1
Remote Control	x1
<u>Other Information</u>	
On-screen Menu Languages	Supports Multiple Languages
Warranty	3-year warranty
<u>Interfaces</u>	
Audio	3.5 mm Audio Jack
RJ45	x1
Motherboard	RK3568

*Specifications are subject to change without notice.