


65" Horizontal Wall-Mounted Digital Signage (BT-TH65WOUT)



24/7
Performance



High-Visibility
Display



IP55 Weather-
Resistant
Enclosure



Smart
Temperature
Control




Eco-Friendly
Power Timer



AR-Treated
Tempered
Glass

Product Dimensions

Product Dimensions:

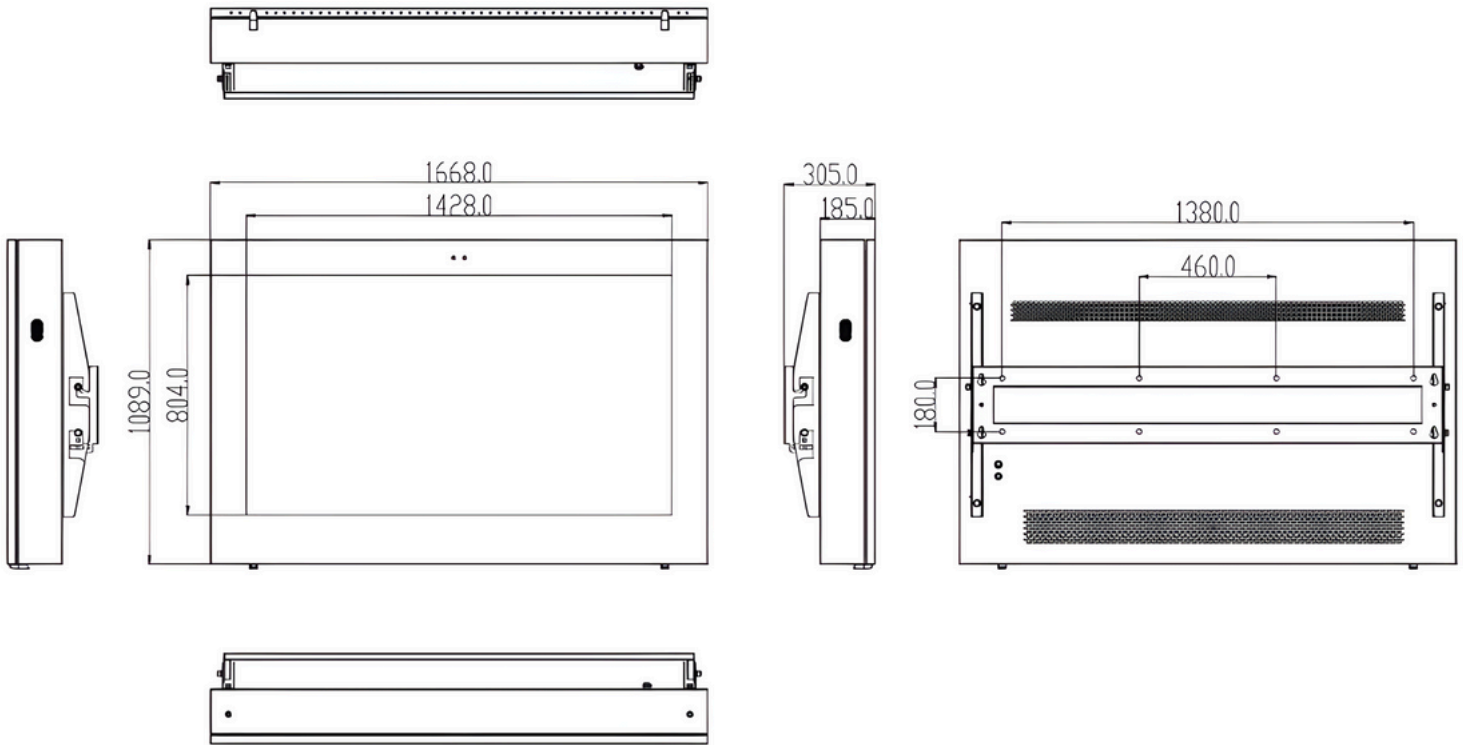

Product Width: 1668 mm / 65.66 in

Product Height: 1089 mm / 42.87 in

Product Thickness (with wall mount): 305 mm / 12 in

Display Section Thickness: 185 mm / 7.28 in

Bezel Width: Top 120.5 mm, Left/Right 120 mm, Bottom 164.5 mm

Product Weight: 160 kg / 352.74 lbs

Full Specifications

Connectivity	
Audio Output	3.5 mm Audio Jack
Video Input	HDMI 2.0 × 1 USB 3.0 × 2
External Control	RJ45
Display Specifications	
Diagonal Size	65"
Aspect Ratio	16:9
Panel Resolution	3840 × 2160p
Brightness	3000 cd/m²
Display Colours	16.7M
Contrast Ratio	1200:1
Viewing Angle (H/V)	178° / 178°
Operating System	
Pre-installed OS	Android 11/13/14
User Convenience	
Installation Options	Landscape
Energy-Saving Features	Smart Power energy-saving technology
Audio	
Built-in Speakers	8Ω5W × 2
Power	
Power Supply	200–240 V~, 50–60 Hz, 3.5A
Maximum Power Consumption	700W
Compliance	Meets UL60950-1 international safety standard, CE,FC,RoHS Compliant
Operating Environment	
Operating Temperature Range	-20 ~ 45°C
Mean Time Between Failures (MTBF)	50,000 hours
Multimedia Application Support	
USB Video Playback Formats:	MPEG, H.264, H.263, H.265, AVI, MP4, VP8
USB Audio Playback Formats	AAC, HEAAC, MPEG
USB Image Playback Formats	BMP, JPEG, PNG

<u>Built-in Hardware</u>	
Processor (CPU)	Quad-core Cortex-A55
Graphics Processor (GPU):	G52 MC1
Memory (RAM)	4 GB DDR
Storage	32 GB
<u>Accessories</u>	
Expansion bolts M12×80	x8
Lifting Screws GB825-88_M12	x2
Remote Control	x1
End Caps	x2
Latching Lock Key	x1
<u>Other Information</u>	
On-screen Menu Languages	Supports Multiple Languages
Warranty	3-year warranty
<u>Interfaces</u>	
Audio	3.5 mm Audio Jack
RJ45	x1
Motherboard	RK3568

*Specifications are subject to change without notice.