

# 65" Ultra-Narrow Wall-Mounted Digital Signage (BT65-HMT)



24/7  
Performance



Portrait or  
Landscape  
Orientation



Full HD  
Display



Remote  
Management




Ultra-Narrow  
Display



IPS Panel  
Technology

# Product Dimensions

## **Product Dimensions:**

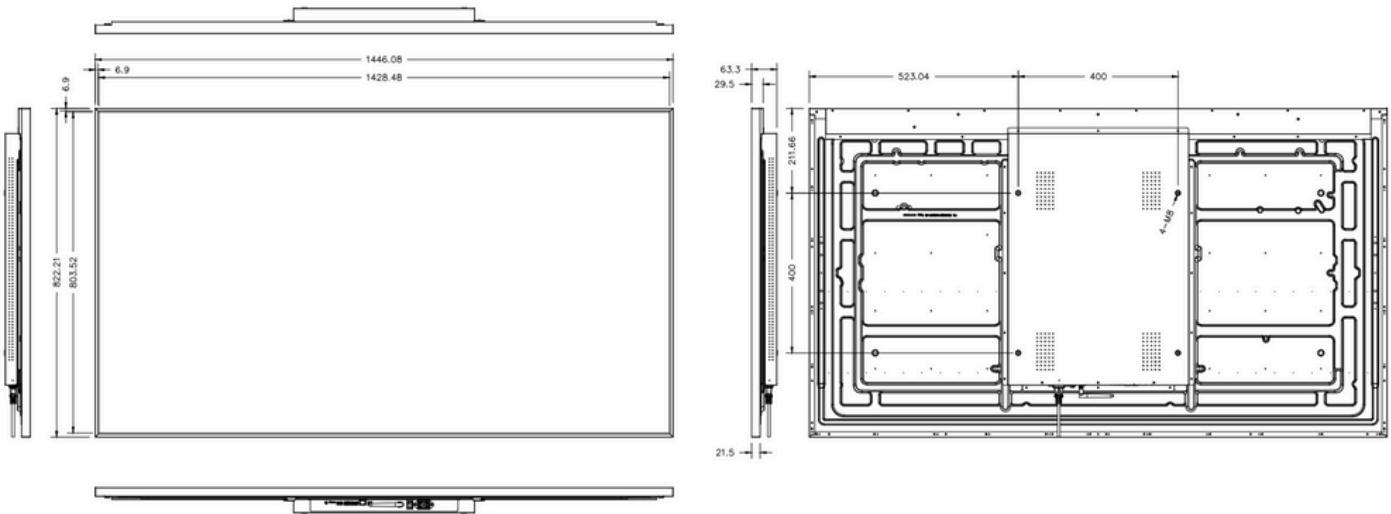

Product Width: 1446.08 mm

Product Height: 822.21mm

Product Thickness: 29.5 mm

Bezel Width: 6.9 mm

Product Weight: 36 kg

# Full Specifications

<b><u>Connectivity</u></b>	
Audio Output	3.5 mm Audio Jack
External Control	RJ45
<b><u>Display Specifications</u></b>	
Diagonal Size	55"
Aspect Ratio	16:9
Panel Resolution	1920×1080p/4K
Brightness	500–700 cd/m <sup>2</sup>
Display Colours	16.7M
Contrast Ratio	1000:1
Viewing Angle (H/V)	178° / 178°
<b><u>Operating System</u></b>	
Pre-installed OS	Android 11/13/14
<b><u>User Convenience</u></b>	
Installation Options	Wall-mounted
<b><u>Audio</u></b>	
Built-in Speakers	2 × 5 W RMS
<b><u>Power</u></b>	
Power Supply	Supports wide voltage range 100–240 V, 50–60 Hz
Power Consumption Standby/Typical	<5 W/100 W
Compliance	Meets UL60950-1 international safety standard, CE, FC, RoHS Compliant
<b><u>Operating Environment</u></b>	
Operating Temperature Range	0 ~ 40°C
Mean Time Between Failures (MTBF)	50,000 hours
<b><u>Multimedia Application Support</u></b>	
Video Format/Playback	H.265, H.264, VP8, MAV, WMV, AVS, H.263, MPEG4
Audio Format/Playback	MP3, WMA, WAV, APE, FLAC, AAC, OGG, M4A, 3GPP
Image Playback Formats	JPG, BMP, PNG

<u><b>Built-in Hardware</b></u>	
Processor	Octa-core (4xA72 + 4xA53) up to 2.2GHz
Graphics Processing Unit (GPU)	3D GPU, OpenGL ES 1.1/2.0/3.2, OpenCL 2.0, Vulkan 1.1
Memory (RAM)	4/8 GB DDR
Storage	32/64 GB
<u><b>Accessories</b></u>	
Power cable	x1
Antenna	x1
Remote Control	x1
<u><b>Other Information</b></u>	
On-screen Menu Languages	Supports Multiple Languages
Warranty	3-year warranty
<u><b>Interfaces</b></u>	
Audio	3.5 mm Audio Jack
RJ45	x1
Motherboard	RK3576

\*Specifications are subject to change without notice.