

75" Slim Outdoor Wall-Mounted Digital Signage IP65 (BT-PH75WOUT)



24/7
Performance



High-Visibility
Display



Full HD
Resolution



Ventilation
Cooling
System




Eco-Friendly
Power Timer



Laminated
Tempered
Glass

Product Dimensions

Product Dimensions:

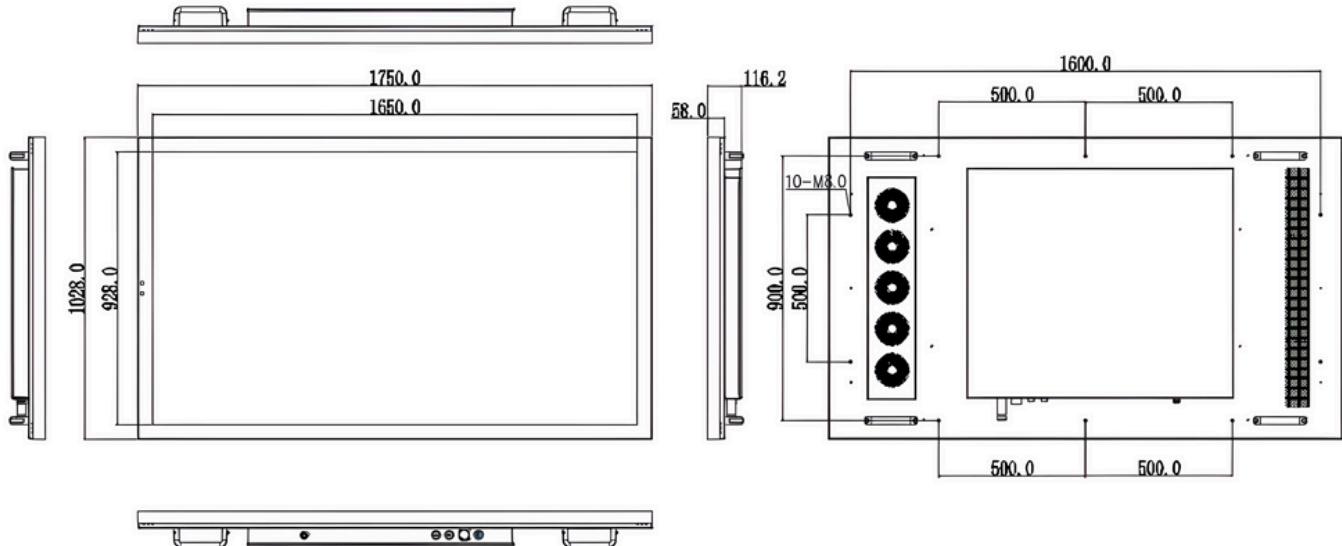

Product Width: 1750 mm / 68.89 inches

Product Height: 1028 mm / 40.47 inches

Product Thickness:

With Wall Mount: 178 mm / 7 inches

At Display Area: 122 mm / 4.8 inches

Bezel Width: Left/Right: 50 mm; Top/Bottom: 50 mm

Product Weight (with Wall Mount): 120 kg / 264.55 lbs

Full Specifications

<u>Connectivity</u>	
Video Input	HDMI 2.0 × 1 USB 3.0 × 2
External Control	RJ45
<u>Display Specifications</u>	
Diagonal Size	75"
Aspect Ratio	16:9
Panel Resolution	3840 × 2160p
Brightness	3000 cd/m ²
Display Colours	16.7M
Contrast Ratio	1200:1
Viewing Angle (H/V)	178° / 178°
Protection Level	IP65 IK10 tempered glass
<u>Operating System</u>	
Pre-installed OS	Android 11/13/14
<u>User Convenience</u>	
Installation Options	Landscape or Portrait
Energy-Saving Features	Smart Power energy-saving technology
<u>Audio</u>	
Built-in Speakers	None, but 8Ω 5W × 2 optional
<u>Power</u>	
Power Supply	200–240 V~, 50–60 Hz, 3.5 A
Typical Power Consumption	700 W
Compliance	Meets UL60950-1 international safety standard, CE, FC, RoHS Compliant
<u>Operating Environment</u>	
Operating Temperature Range	-20 ~ 60°C
Mean Time Between Failures (MTBF)	50,000 hours

<u>Multimedia Application Support</u>	
USB Video Playback Formats:	MPEG, H.264, H.263, H.265, AVI, MP4, VP8
USB Audio Playback Formats	AAC, HEAAC, MPEG
USB Image Playback Formats	BMP, JPEG, PNG
<u>Built-in Hardware</u>	
Processor (CPU)	Quad-core Cortex-A55
Graphics Processor (GPU):	G52 MC1
Memory (RAM)	4 GB DDR
Storage	32 GB
<u>Accessories</u>	
Expansion bolts M12×80	x8
Remote Control	x1
<u>Other Information</u>	
On-screen Menu Languages	Supports Multiple Languages
Warranty	3-year warranty
<u>Interfaces</u>	
RJ45	x1
Motherboard	RK3568

* Specifications are subject to change without notice.