

86" Slim Outdoor Wall-Mounted Digital Signage IP65 (BT-PH86WOUT)



24/7
Performance



High-Visibility
Display



Full HD
Resolution



Ventilation
Cooling
System




Eco-Friendly
Power Timer



Laminated
Tempered
Glass

Product Dimensions

Product Dimensions:

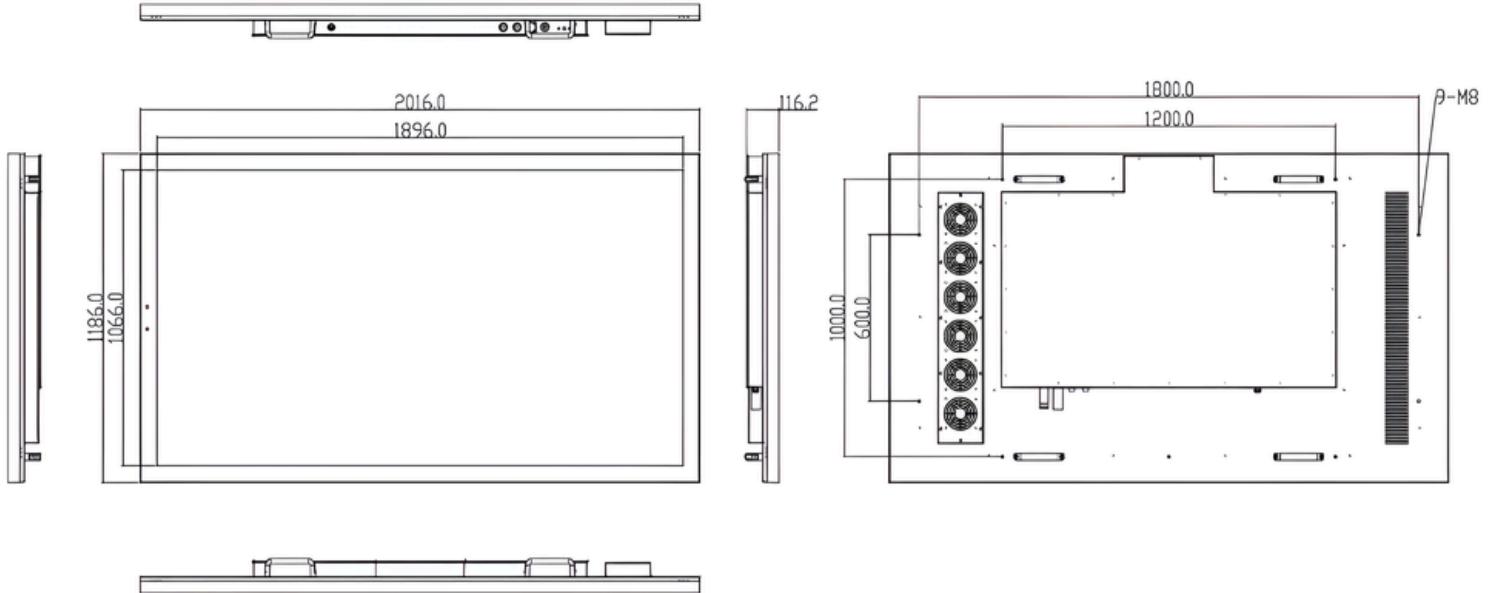

Product Width: 2016 mm

Product Height: 1186 mm

Product Depth: 116.2 mm

Net Weight: 143 kg

Full Specifications

| <u>Connectivity</u> | |
|-----------------------------------|---|
| Video Input | HDMI 2.0 × 1 USB 3.0 × 2 |
| External Control | RJ45 x1 WIFI x1 |
| <u>Display Specifications</u> | |
| Diagonal Size | 86" |
| Aspect Ratio | 16:9 |
| Panel Resolution | 3840 × 2160p |
| Brightness | 3000 cd/m ² |
| Display Colours | 16.7M |
| Contrast Ratio | 1200:1 |
| Viewing Angle (H/V) | 178° / 178° |
| Protection Level | IP65 IK10 tempered glass |
| <u>Operating System</u> | |
| Pre-installed OS | Android 11/13/14 |
| <u>User Convenience</u> | |
| Installation Options | Landscape or Portrait |
| Energy-Saving Features | Smart Power energy-saving technology |
| <u>Audio</u> | |
| Built-in Speakers | None, but 8Ω 5W × 2 optional |
| <u>Power</u> | |
| Power Supply | 200–240 V~, 50–60 Hz, 4.0 A |
| Typical Power Consumption | 1050 W |
| Compliance | Meets UL60950-1 international safety standard, CE, FC, RoHS Compliant |
| <u>Operating Environment</u> | |
| Operating Temperature Range | -20 ~ 45°C |
| Mean Time Between Failures (MTBF) | 50,000 hours |

| | |
|--|--|
| <u>Multimedia Application Support</u> | |
| USB Video Playback Formats: | MPEG, H.264, H.263, H.265, AVI, MP4, VP8 |
| USB Audio Playback Formats | AAC, HEAAC, MPEG |
| USB Image Playback Formats | BMP, JPEG, PNG |
| <u>Built-in Hardware</u> | |
| Processor (CPU) | Quad-core Cortex-A55 |
| Graphics Processor (GPU): | G52 MC1 |
| Memory (RAM) | 4 GB DDR |
| Storage | 32 GB |
| <u>Accessories</u> | |
| User Manual | x1 |
| Remote Control with AAA batteries | x1 |
| <u>Other Information</u> | |
| On-screen Menu Languages | Supports Multiple Languages |
| Warranty | 3-year warranty |
| <u>Interfaces</u> | |
| RJ45 | x1 |
| Motherboard | RK3568 |

*Specifications are subject to change without notice.